


HTLR 40D1S

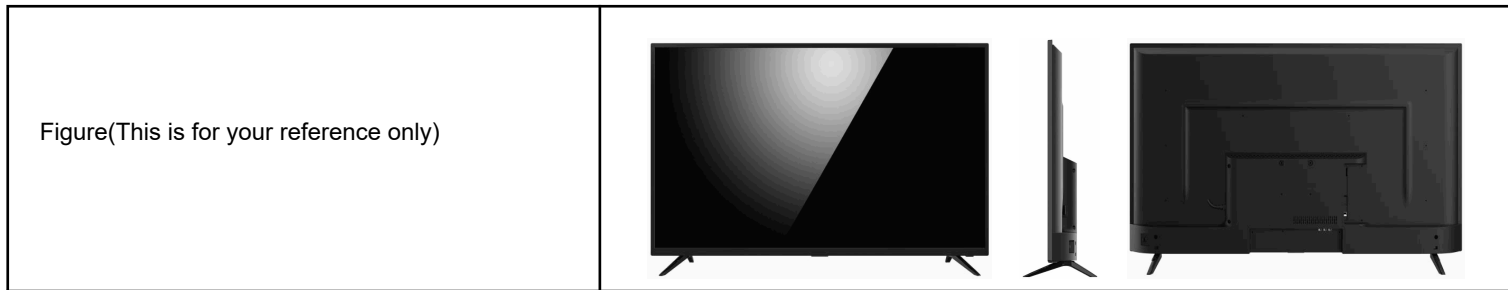

1.Panel spec

OC supplier(random allocation without appoint)	Innolux
Size	39.5" diagonal
Backlight	DLED direct Type
Maximum resolution	1920×1080
LCM Center Luminance of White	Min:150cd/m ² ; Typ:180cd/m ²
Contrast ratio (Typ)	5000:1
Response time(Typ)	9.5ms
Display scale	16:09
Viewing angle(CR>10)	Typ (H:178° , V:178°)
Display Colors	16.7 M
Color Gamut(NTSC)	≥NTSC 62%

2.Hardware Information

ATV	PAL SECAM
DTV	DVB-T, DVB-T2, DVB-C, DVB-S/S2 (optional)
CPU Frame	ARM Cortex-A35/1.6GHz/Quad core
GPU	Mali -400MP2/Dual core
RAM(DDR3)	1GB
ROM(Flash)	8GB (16GB optional)
Audio power(Output)	4W+4W(24inch or below 24 inch), 6W+6W(32 inch or above 32inch)
WIFI(Type)	1R1T
HDMI 1.4 (HDCP 1.4)	-
HDMI 2.0 (HDCP 2.2)	2
USB 2.0	2
USB 3.0	-
VGA	-
AV In	1
YPbPr In	1(optional, when choose CI no Ypbpr)
CI	1
PC Audio	-

RJ-45	1
Earphone	-
Audio In	-
Audio Out	-
Video Out	-
SPDIF Out	1(coaxial default , optical optional)

3. Software Function

Channel list	YES
Channel edit	YES
Picture freezing	NO
MTS/NICAM	MTS
Sleep time setting	YES
Teletext	YES
PVR	YES
EPG	YES
V_CHIP/Parental Guidance	V_CHIP
CC(Closed caption)	YES
AD(Audio description)	YES
TTS(Text to Speech)	NO
CI+	Optional
DOLBY	YES
HDMI-ARC	HDMI-1
HDMI-CEC	YES
HDMI-MHL	NO
Operation system	Android 8.0
OTA	YES
Hotel mode	COTT HIMS Software

4. Structure Information

Base model name	BCCJ-32 Bow shaped plastic stand
Size (without stand) L×W×H	904x70x519mm
Size (with stand) L×W×H	904x178x555mm
Size (carton) L×W×H	995x118x610mm
Net Weight (without stand)	5.71kg
Net Weight (with stand)	5.8kg
Gross Weight (without stand)	7.61kg
Gross Weight (with stand)	7.7kg
Size (Wall hanging)	75x75mm

5. Power Management&Safety&Certificate

Power input	100-240VAc
Fire rating	UL94-HB75

Standby power	≤0.5W
Rated power	55W
Working condition	Temperature:5°C~40°C, Humidity:10%~85%, Atmosphere:86KPa~106KPa
Storage condition	Temperature:-20°C~55°C, Humidity:5%~95%, Atmosphere:86kPa~106kPa

6.Accessory

Stand(Optional)	1PCS
Remote control	1PCS
Instruction	1PCS
Warranty card(Optional)	1PCS
Battery(Optional)	2PCS